


Adhesive Lined Grommet Edging

Grommet edging protects and prevents wires and cables from chafing against sharp edges of panel walls and knockouts. In addition to standard grommet edging, *PANDUIT* offers grommet edging with a pressure sensitive adhesive that lines the base of the product. This provides for an easy, clean, and secure application. Adhesive lined grommet edging is available in natural and weather resistant polyethylene and can be used on straight or irregular shaped surfaces.

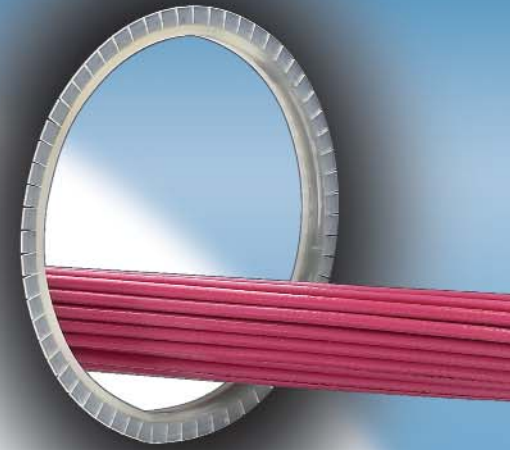

Clean the edge of the panel, install the product over the edge of the panel and then apply thumb pressure to activate the adhesive and the installation is complete.

Key Features

Benefits

Adhesive lined	Eliminates messy, user supplied adhesives for a faster and cleaner install; ensures the product will stay where it is installed
No liner to remove from adhesive	Increases productivity and lowers installed cost
Polyethylene material	Economical, durable, and highly flexible
Slotted or solid wall construction	For holes, inside curves, and straight paths to support a range of applications
Available on 100' reel	Allows for easy handling and dispensing of product

Technical Information

Material:	Polyethylene or weather resistant polyethylene with rubber based adhesive
Maximum temperature rating:	122°F (50°C)
Minimum temperature rating:	-40°F (-40°C)
Color:	Available in black or natural


Use these tables as a guide to determine *PANDUIT* grommet edging sizes. The most common gauges for electrical applications of sheet metal dimensions are listed based on the Manufacturer Standard Gauge for Steel.

Gauge	Manufacturer Standard Gauge for Steel (In.)
5	.2092
6	.1943
7	.1793
8	.1644
9	.1495
10	.1345
11	.1196
12	.1046
13	.0897


Gauge	Manufacturer Standard Gauge for Steel (In.)
14	.0747
15	.0673
16	.0598
17	.0538
18	.0478
19	.0418
20	.0359
21	.0329
22	.0299

Gauge	Manufacturer Standard Gauge for Steel (In.)
23	.0269
24	.0239
25	.0209
26	.0179
27	.0164
28	.0149
29	.0135
30	.0120

Adhesive Lined Grommet Edging

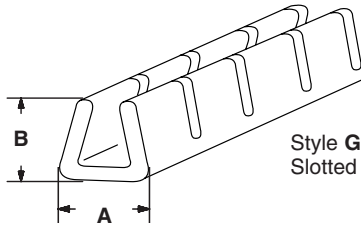

Style **GEE_F-A-**
Slotted Wall

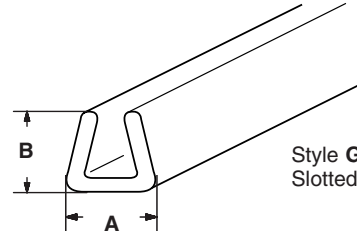


Style **GES_F-A-**
Slotted Wall

Ordering Information


Part Number	Material	Color	Panel Thickness		Dimensions A		Dimensions B		Feet Per Pkg.*	Std. Pkg. Qty.
			In.	mm	In.	mm	In.	mm		
Slotted Wall										
GEE62F-A-C	Continuous Polyethylene with Adhesive	Natural	.036 – .062	.9 – 1.6	.131	3.3	.160	4.1	100	1
GEE62F-A-C0		Black	.036 – .062	.9 – 1.6	.131	3.3	.160	4.1	100	1
GEE99F-A-C		Natural	.062 – .099	1.6 – 2.5	.169	4.3	.185	4.7	100	1
GEE99F-A-C0		Black	.062 – .099	1.6 – 2.5	.169	4.3	.185	4.7	100	1
GEE144F-A-C		Natural	.099 – .144	2.5 – 3.7	.213	5.4	.222	5.6	100	1
GEE144F-A-C0		Black	.099 – .144	2.5 – 3.7	.213	5.4	.222	5.6	100	1
Solid Wall										
GES62F-A-C	Continuous Polyethylene with Adhesive	Natural	.036 – .062	.9 – 1.6	.131	3.3	.160	4.1	100	1
GES62F-A-C0		Black	.036 – .062	.9 – 1.6	.131	3.3	.160	4.1	100	1
GES99F-A-C		Natural	.062 – .099	1.6 – 2.5	.169	4.3	.185	4.7	100	1
GES99F-A-C0		Black	.062 – .099	1.6 – 2.5	.169	4.3	.185	4.7	100	1
GES144F-A-C		Natural	.099 – .144	2.5 – 3.7	.213	5.4	.222	5.6	100	1
GES144F-A-C0		Black	.099 – .144	2.5 – 3.7	.213	5.4	.222	5.6	100	1

*Order the number of reels required.


Other Grommet Edging Products Available Without Adhesive

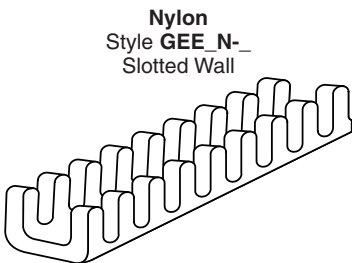


Nylon
Style **GEE_N-**
Slotted Wall




Polyethylene
Style **GEE_F-**
Slotted Wall




Flame Retardant Polyethylene
Style **GEE_FR-**
Slotted Wall

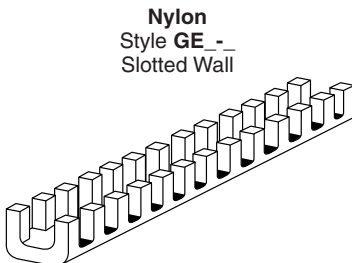

Nylon
Style **GE_-**
Slotted Wall



Polyethylene
Style **GES_F-**
Solid Wall



Flame Retardant Polyethylene
Style **GES_FR-**
Solid Wall

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-dn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.3767.7011

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of **PANDUIT** product warranties, log on to www.panduit.com/warranty

For more information



©2008 **PANDUIT** Corp.
ALL RIGHTS RESERVED.
Product Bulletin Number **WW-WACB16**
8/2008